

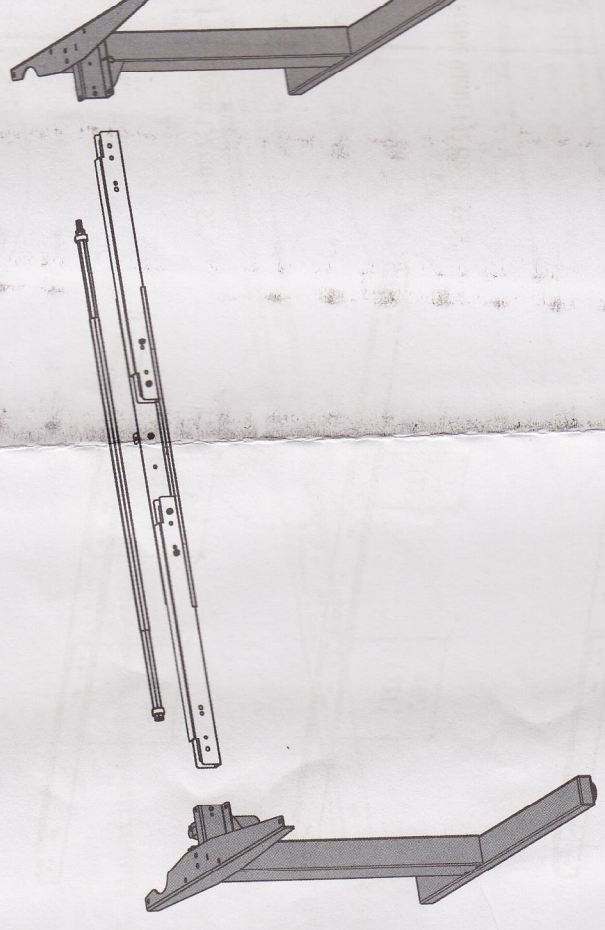


Assembly instruction  
Flex top beam  
13780




**1. Decide your frame width**


Measures in mm / inch

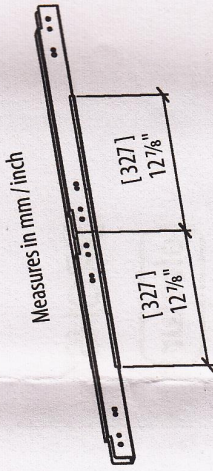


Frame width 112 cm | 44 1/8"

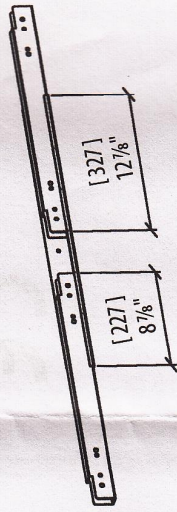


Frame width 122 cm | 48"

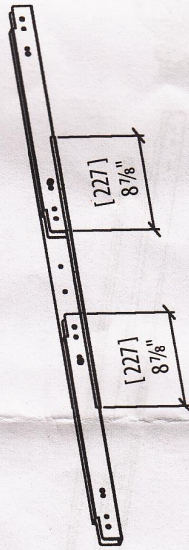

Frame width 132 cm | 52"

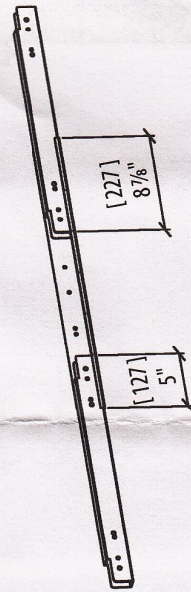


Frame width 142 cm | 55 7/8"

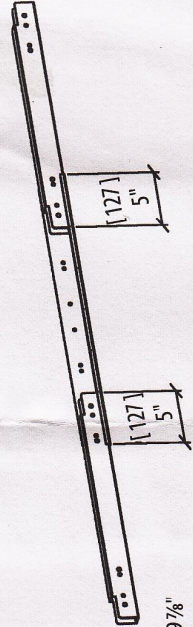


Frame width 152 cm | 59 7/8"


**2. Fix the top beam with the suitable screws**

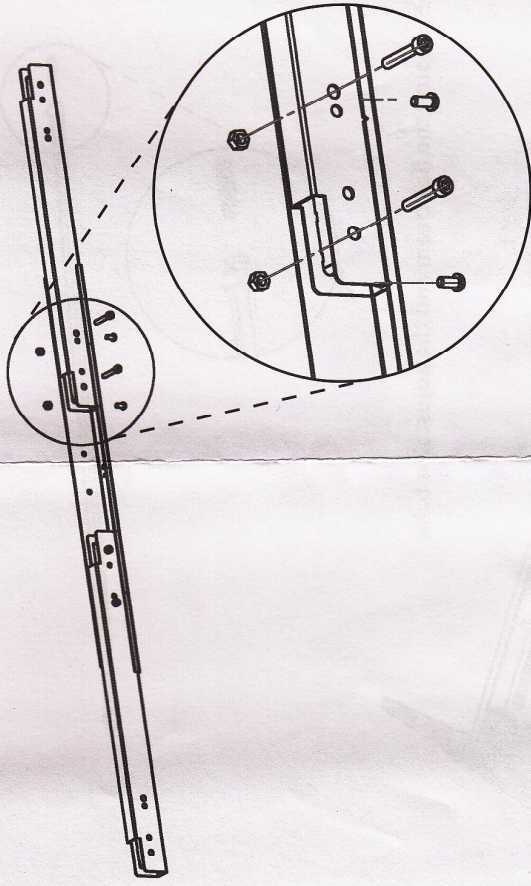

**3. Mount the top bracket**

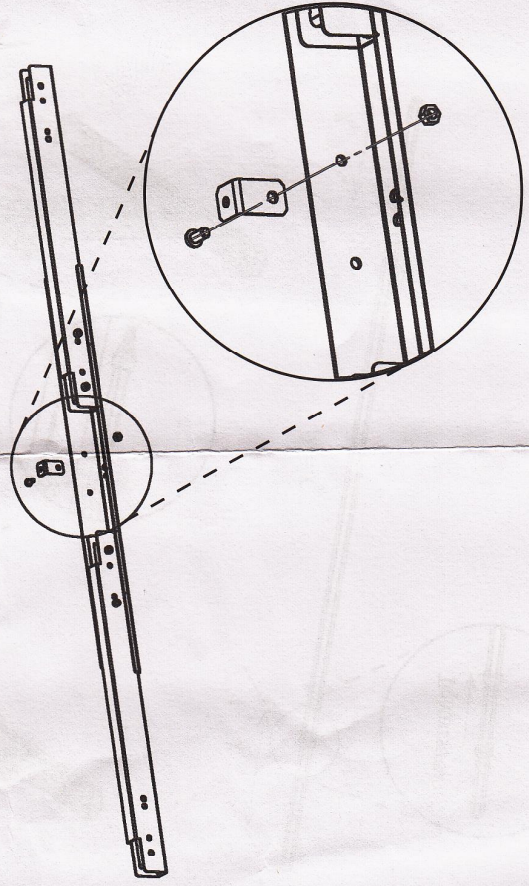

4. Place the adaptor in the adjustable tube

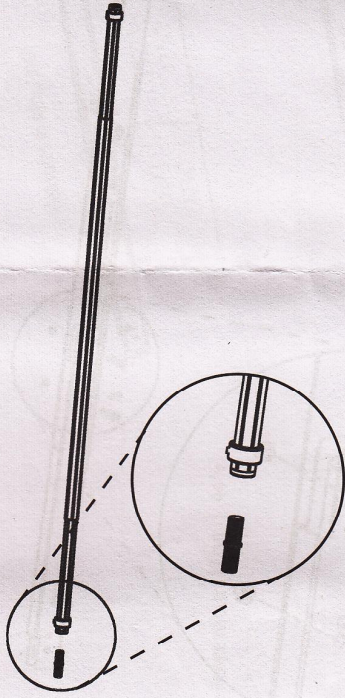

5. Mount the flex beam and the adjustable tube

Step 1:  
Mount the flex beam

Step 2:  
Mount the adjustable tube

